Current IMS Database

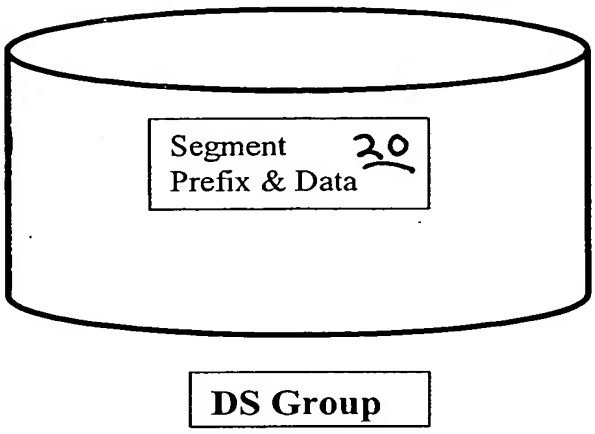

Fig 1A
(Prior Art)

Invention Database

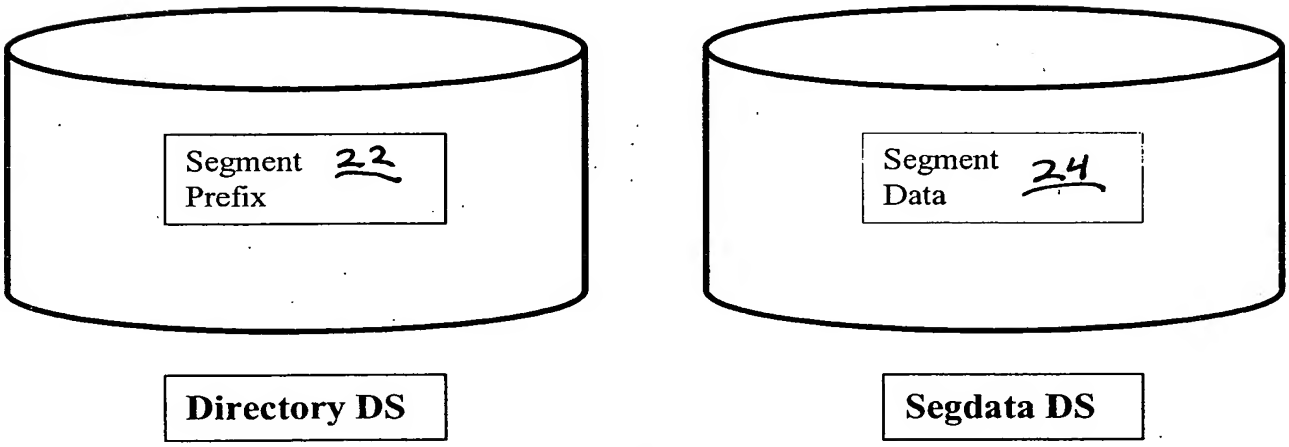

Fig 1B

40036815.10.1901

Layout of Segment in Directory Dataset

Segment Prefix 26		Segment Data 28		
Seg Code & Delete Byte 30	Prefix Pointers 32	Pointer to Seg Data 34	Metadata	
			Seg Key 38	Born-On-Date 36

Figure 2A. Split Segment Composition – Prefix Portion with Metadata in segment data portion

Layout of Segment in Segdata Dataset

Segment Prefix 26				Seg Data 28
Seg Code & Delete Byte 30	Prefix Pointers 32	Metadata		Pointer to Seg Data 34
		Seg Key 38	Born-On-Date 36	

Figure 2B. Split Segment Composition – Prefix Portion with Metadata in segment prefix portion

10059815 - 10/19/04

10096815.100901

Layout of Segment in Segdata Dataset

Segment Prefix 40	Segment Data 42	Trans-parent 44
Seg code & delete byte 46	User Data 48	Born on Date 50

Fig. 3

```
DBD     NAME=IVPDB1,ACCESS=(HIDAM,OSAM)

DIR     DD1=DFSIVD1,SIZE=2048,UOW=(500,50,10)

DATASET DD1=DFSIVD1A,DEVICE=3380,SIZE=2048
SEGM    NAME=A1111111,PARENT=0,BYTES=40,RULES=(LLV,LAST),PTR=(TB,CTR)
FIELD   NAME=(A1111111,SEQ,U),BYTES=010,START=00001,TYPE=C
FIELD   NAME=A9999999,BYTES=010,START=00011,TYPE=C
LCHILD  NAME=(A1,IVPDB1I),POINTER=INDX,RULES=LAST
LCHILD  NAME=(A1X,IVPDB1X),POINTER=INDX
XDFLD   NAME=AXXXXXXX,SEGMENT=A1111111,SRCH=(A9999999)
LCHILD  NAME=(C1X,IVPDB1Z),POINTER=INDX
XDFLD   NAME=CXXXXXXX,SEGMENT=C1111111,SRCH=(C9999999)

DATASET DD1=DFSIVD1B,DEVICE=3380,SIZE=4096
SEGM    NAME=B1111111,PARENT=A1111111,BYTES=(1000,50),                  X
              RULES=(LLV,LAST),PTR=(TB)
FIELD   NAME=(B1111111,SEQ,M),BYTES=010,START=00003,TYPE=C
FIELD   NAME=/SXB1
LCHILD  NAME=(B1X,IVPDB1Y),POINTER=INDX
XDFLD..NAME=BXXXXXXX,SEGMENT=B1111111,SRCH=(B1111111),SUBSEQ=(/SXB1)

DATASET DD1=DFSIVD1C,DEVICE=3380,SIZE=8192
SEGM    NAME=C1111111,PARENT=B1111111,COMPRTN=(DFSKMPX0,DATA,INIT),   X
              RULES=(LLV,LAST),PTR=(TB),BYTES=(8000,50)
FIELD   NAME=(C1111111,SEQ,U),BYTES=010,START=00003,TYPE=C
FIELD   NAME=C9999999,BYTES=010,START=00011,TYPE=C

DIRGEN

DBDGEN
FINISH
END
```

Figure 4A Sample HIDAM DBD

```
DBD     NAME=IVPDB2,ACCESS=HDAM,RMNAME=(DFSHDC40,4,1000)

DIR  DD1=DFSIVD2,UOW=(100,10)

DATASET DD1=DFSIVD2A,DEVICE=3380,SIZE=2048
SEGM    NAME=A1111111,PARENT=0,BYTES=40,RULES=(LLL,LAST),        X
              COMPRTN=(DFSKMPX0,DATA,INIT)
FIELD   NAME=(A1111111,SEQ,U),BYTES=010,START=00001,TYPE=C

DATASET DD1=DFSIVD2B,DEVICE=3380,SIZE=4096
SEGM    NAME=B1111111,PARENT=A1111111,BYTES=(1000,50),           X
              RULES=(LLV,LAST),PTR=(TB)
FIELD   NAME=(B1111111,SEQ,U),BYTES=010,START=00003,TYPE=C

DATASET DD1=DFSIVD2C,DEVICE=3380,SIZE=8192
SEGM    NAME=C1111111,PARENT=B1111111,COMPRTN=(DFSKMPX0,DATA,INIT),
        RULES=(LLV,LAST),PTR=TB,BYTES=8000
FIELD   NAME=(C1111111,SEQ,U),BYTES=010,START=00001,TYPE=C

DIRGEN

DBDGEN
FINISH
END
```

124

Figure 4B Sample HDAM DBD

Page 74 of 95 - 5/8/2003

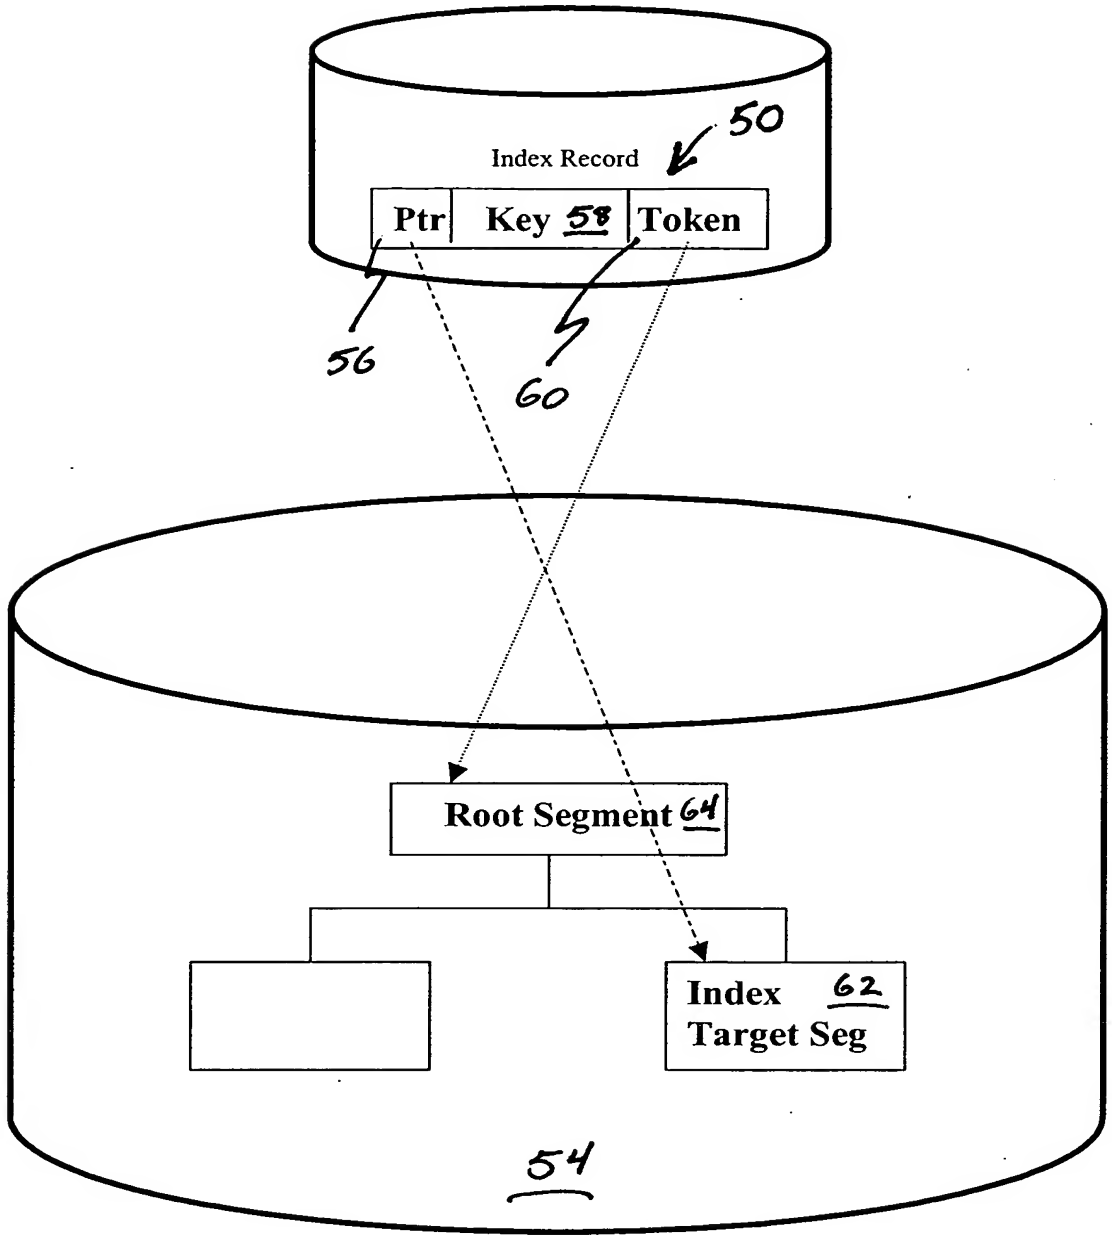

Figure 5 Secondary Index Architecture

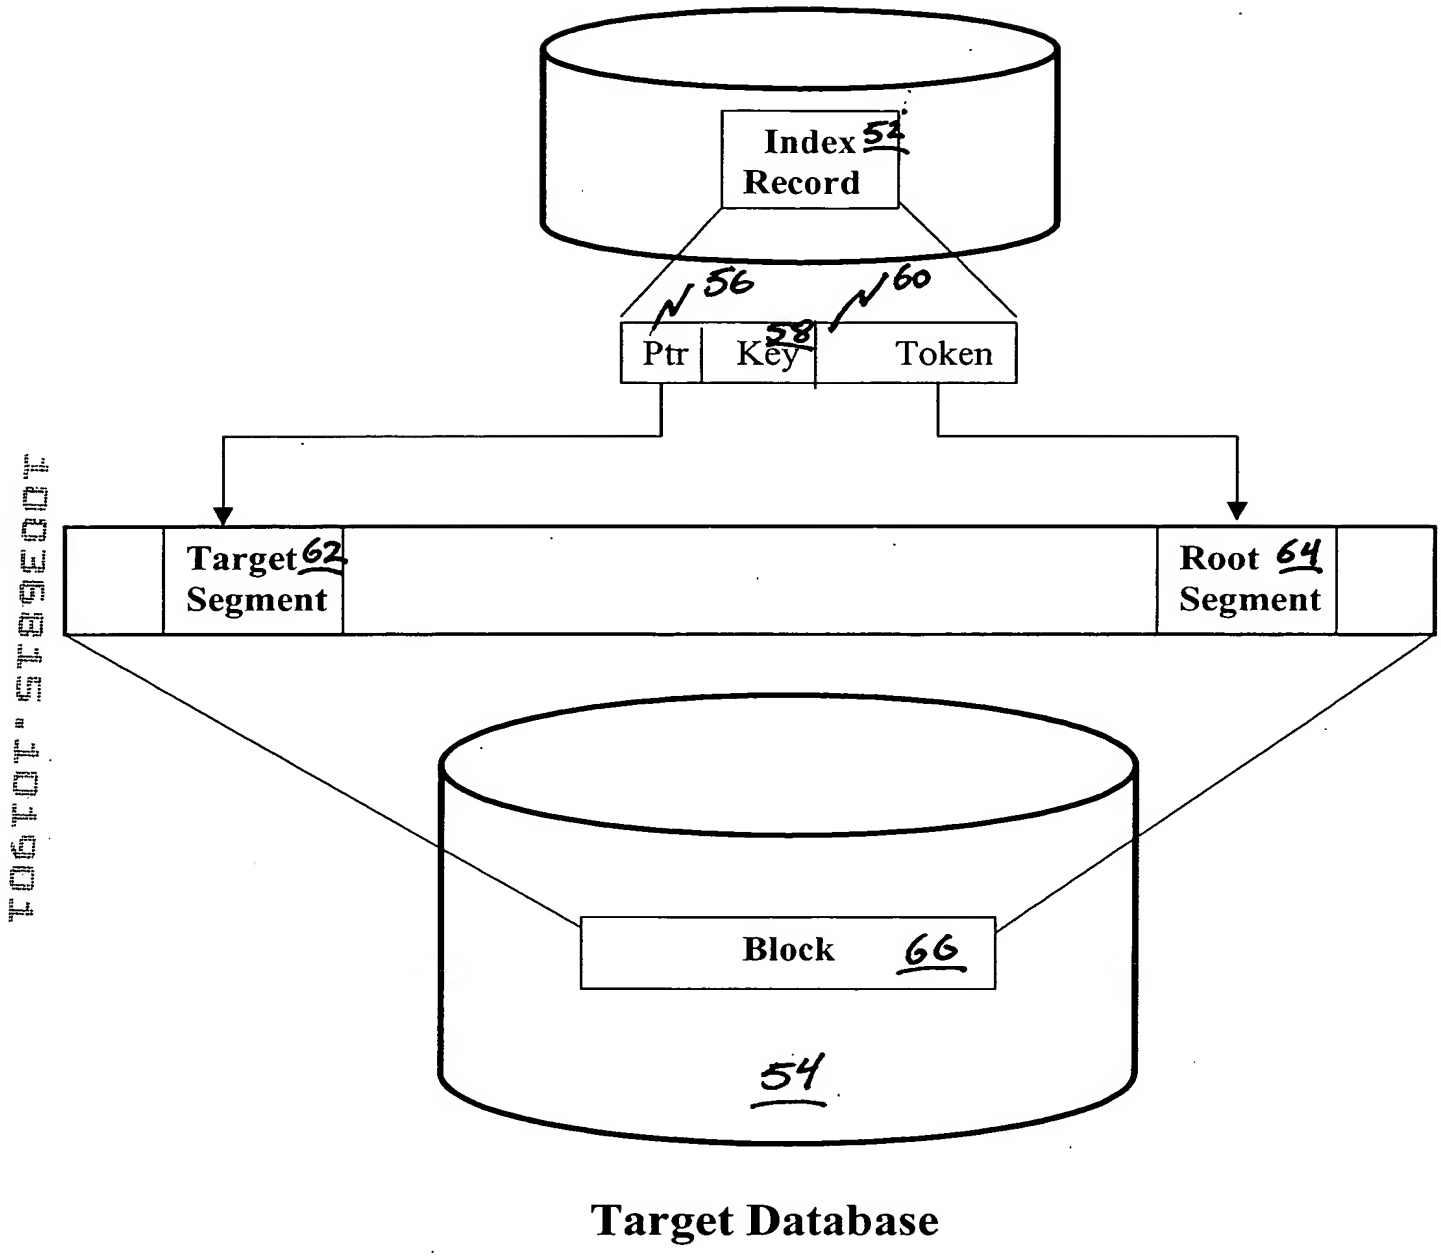

Figure 6 Secondary Index Before Reorganizing

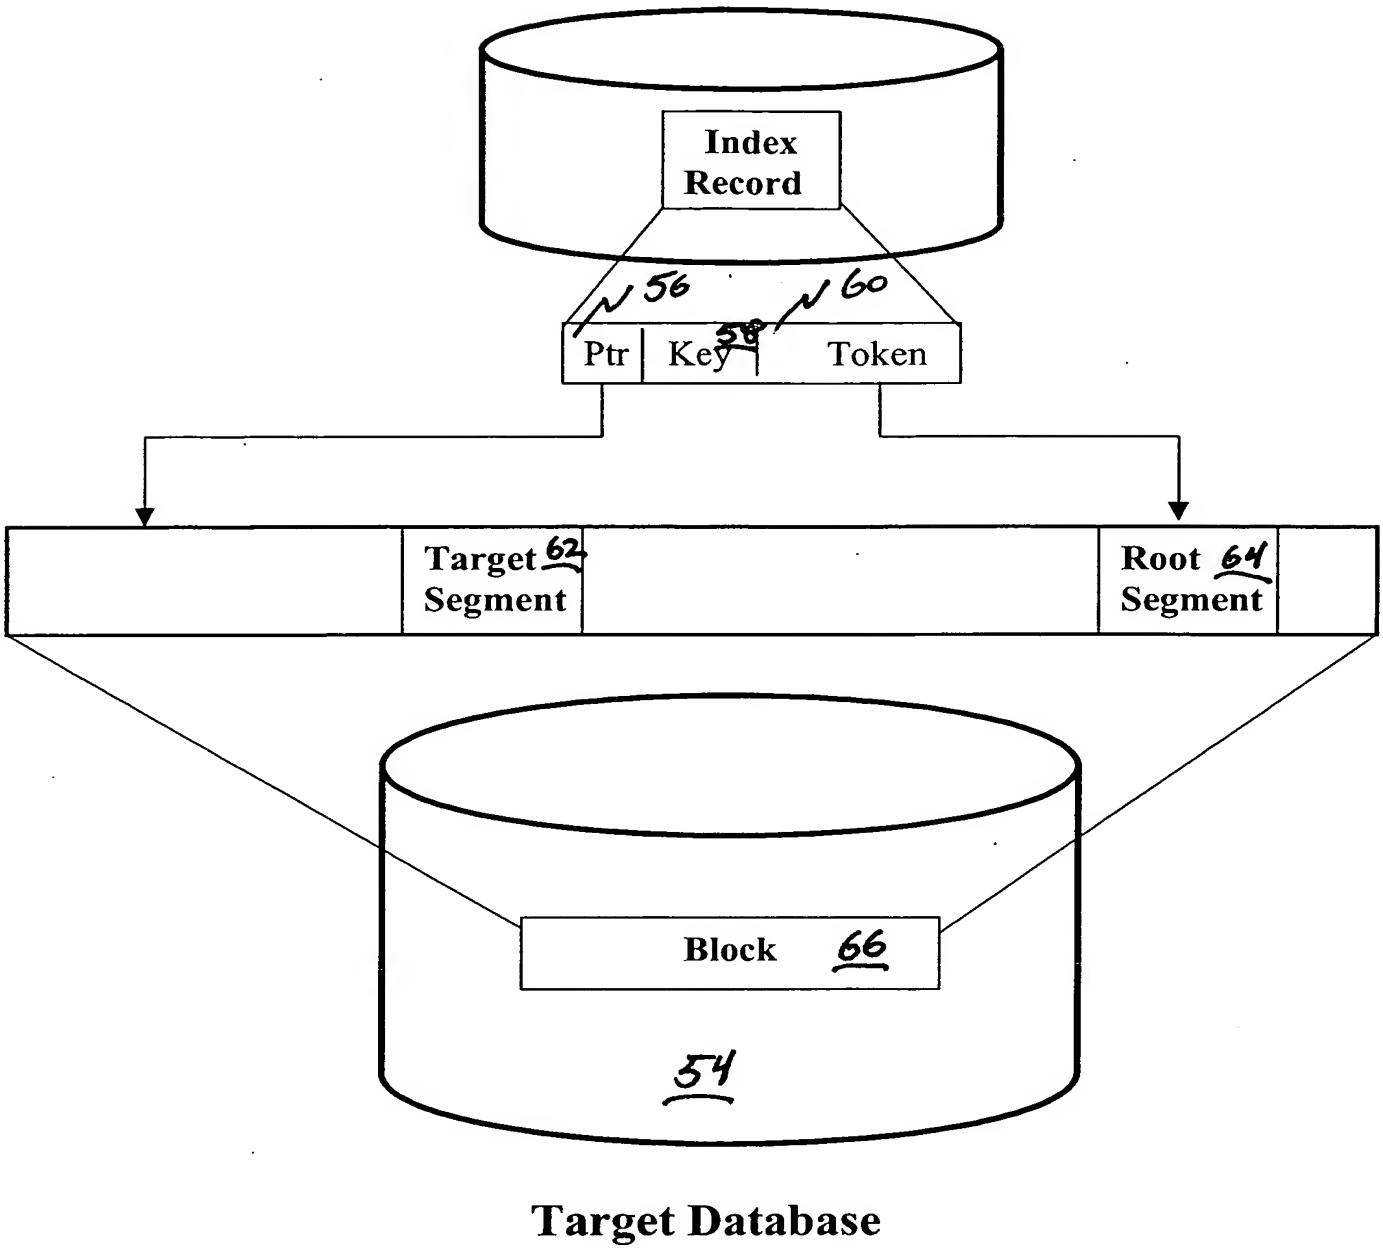

Figure 7 Secondary Index After Reorganizing

T06760-T06760.pdf

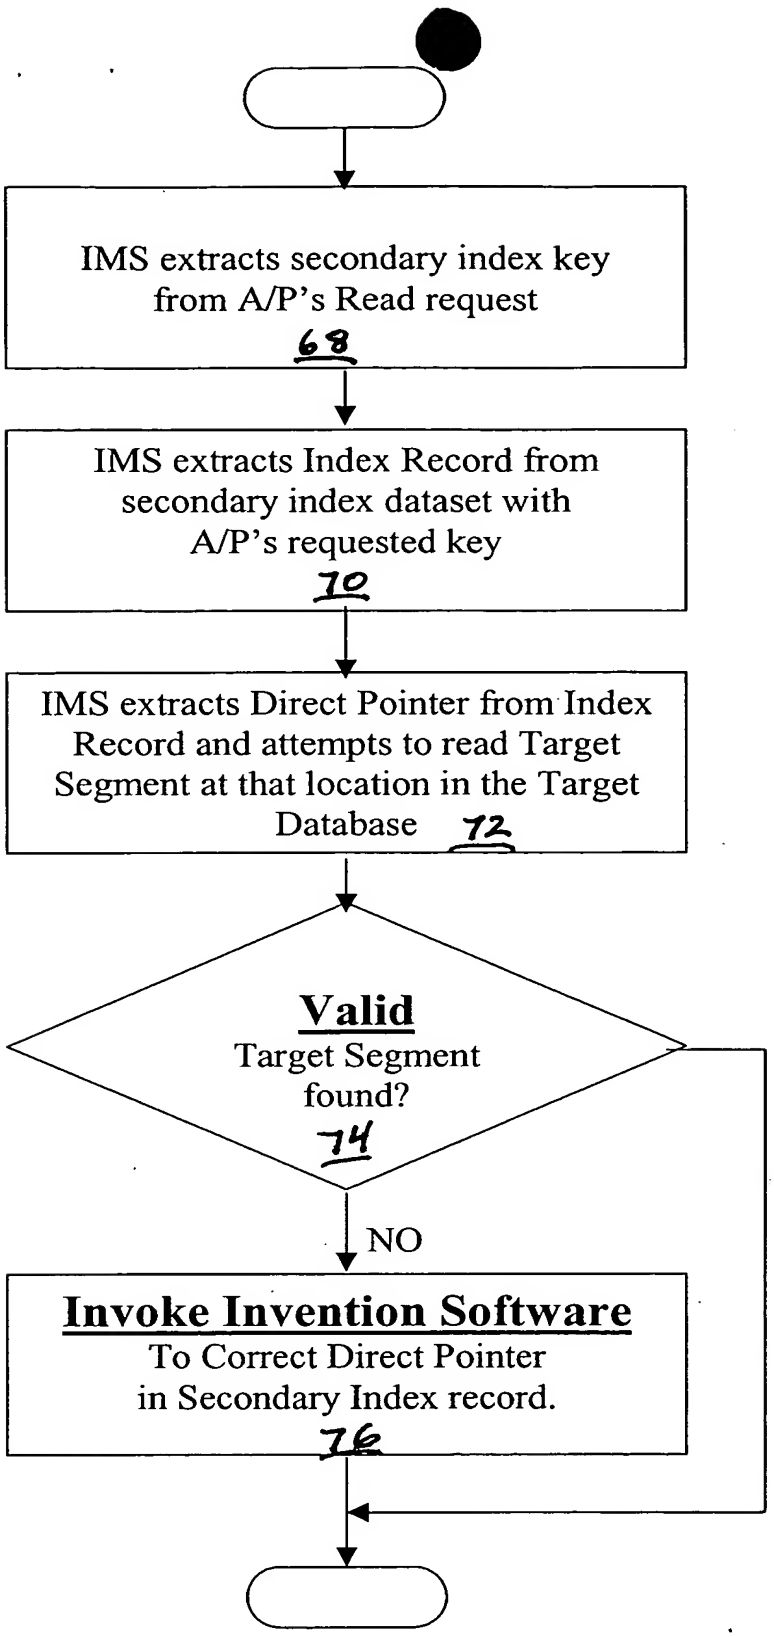

Figure 8 Retrieving a Target Segment via a Secondary Index

4608.5.4.0.4

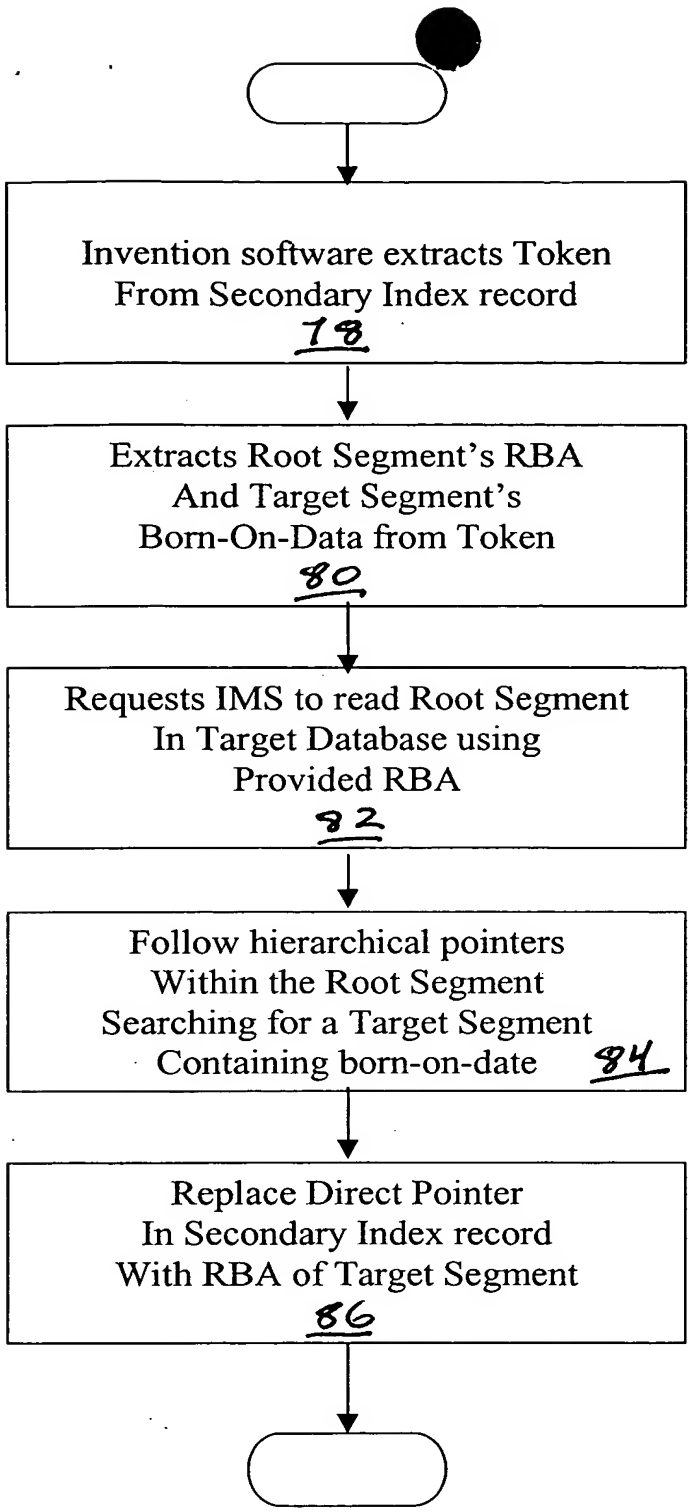

Figure 9 Correcting Direct Pointer in a Secondary Index

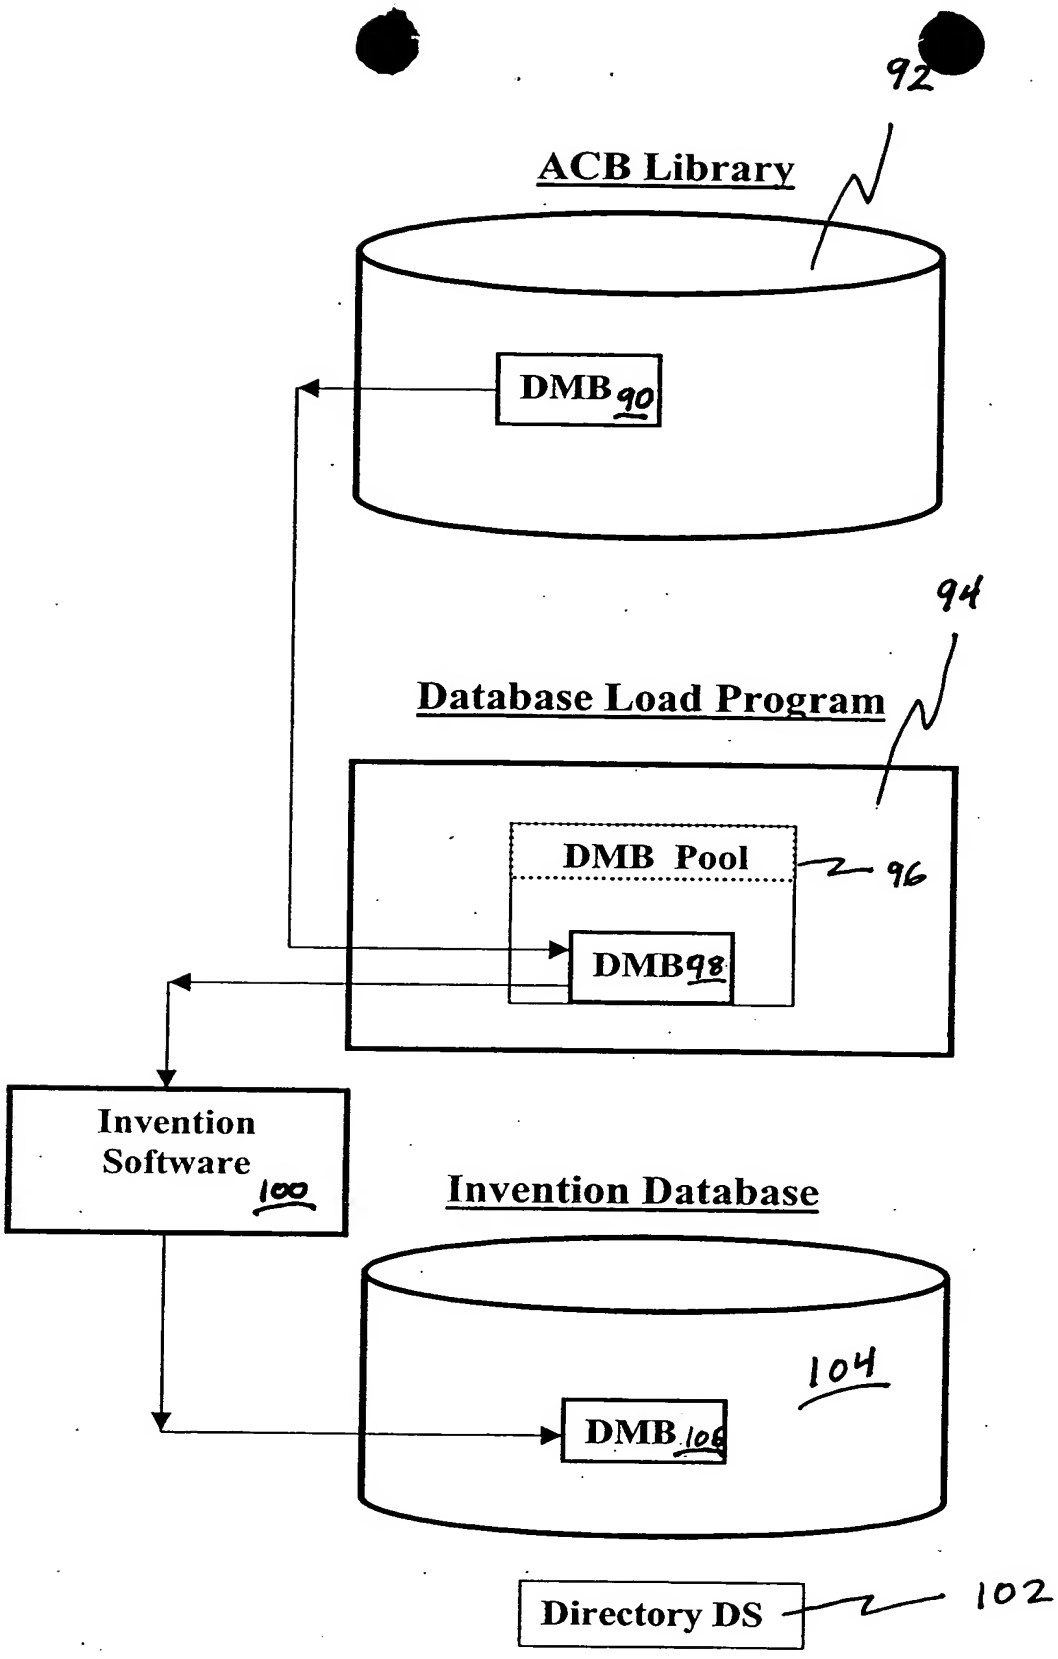

Figure 10 Saving the Database Definition at DB Load Time

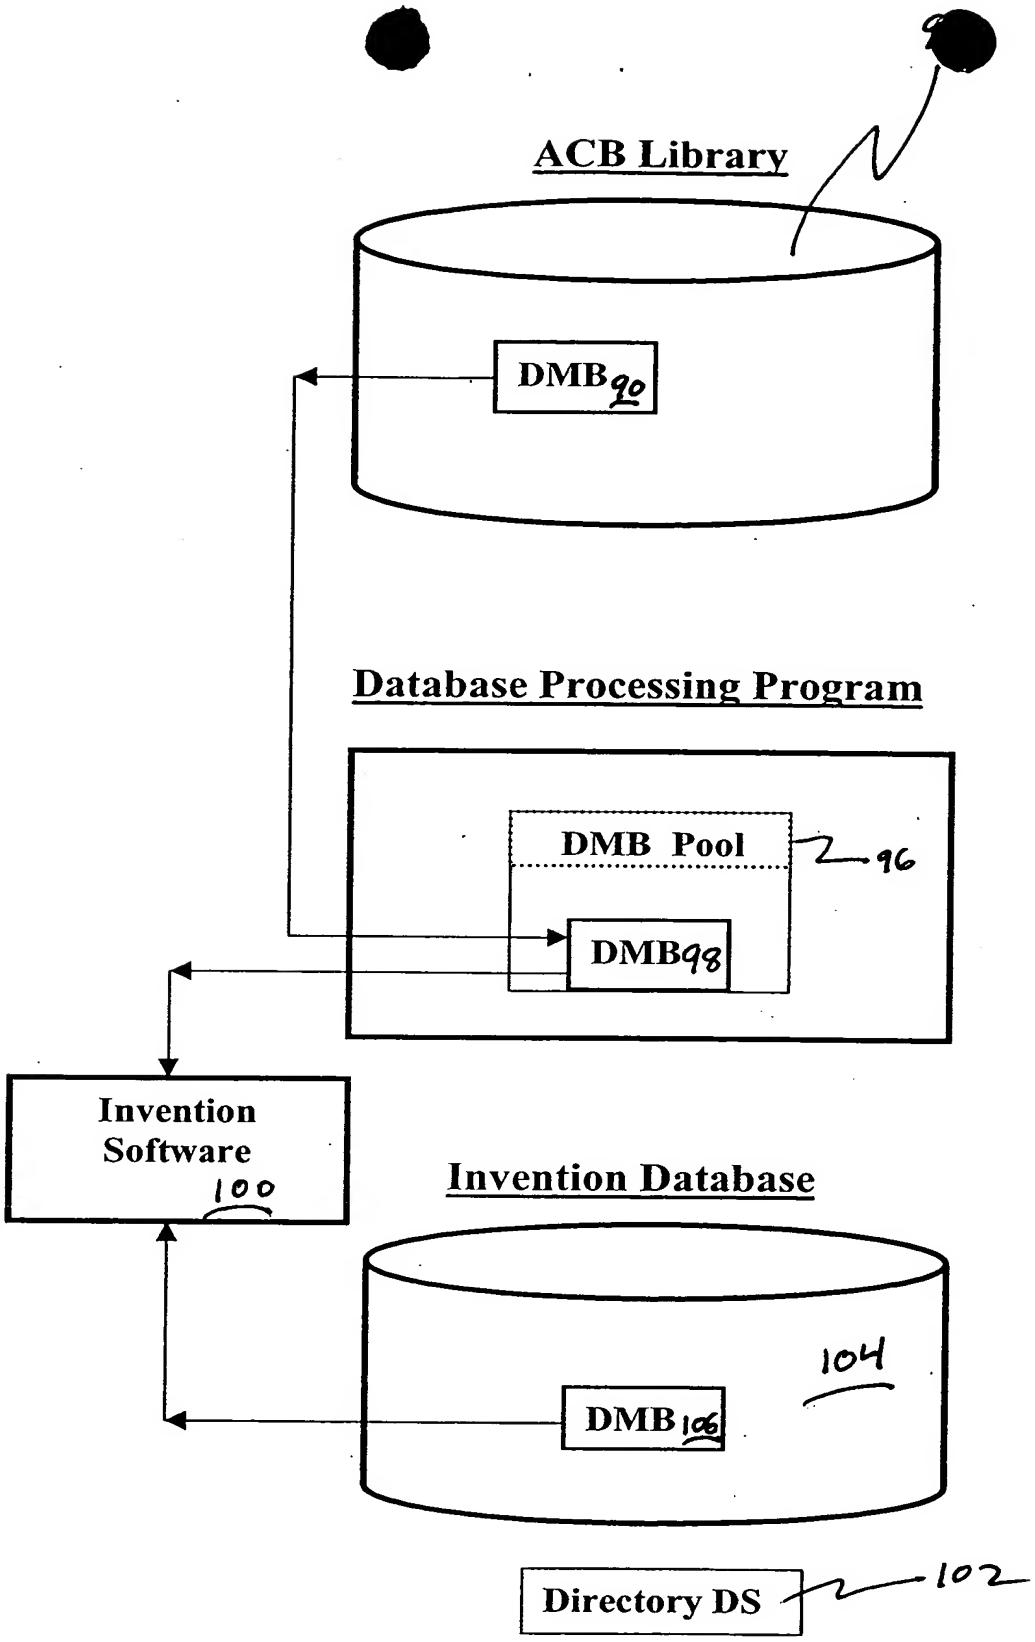

7003681 5-101907

Figure 11 Checking the Database Definition at DB Processing Time

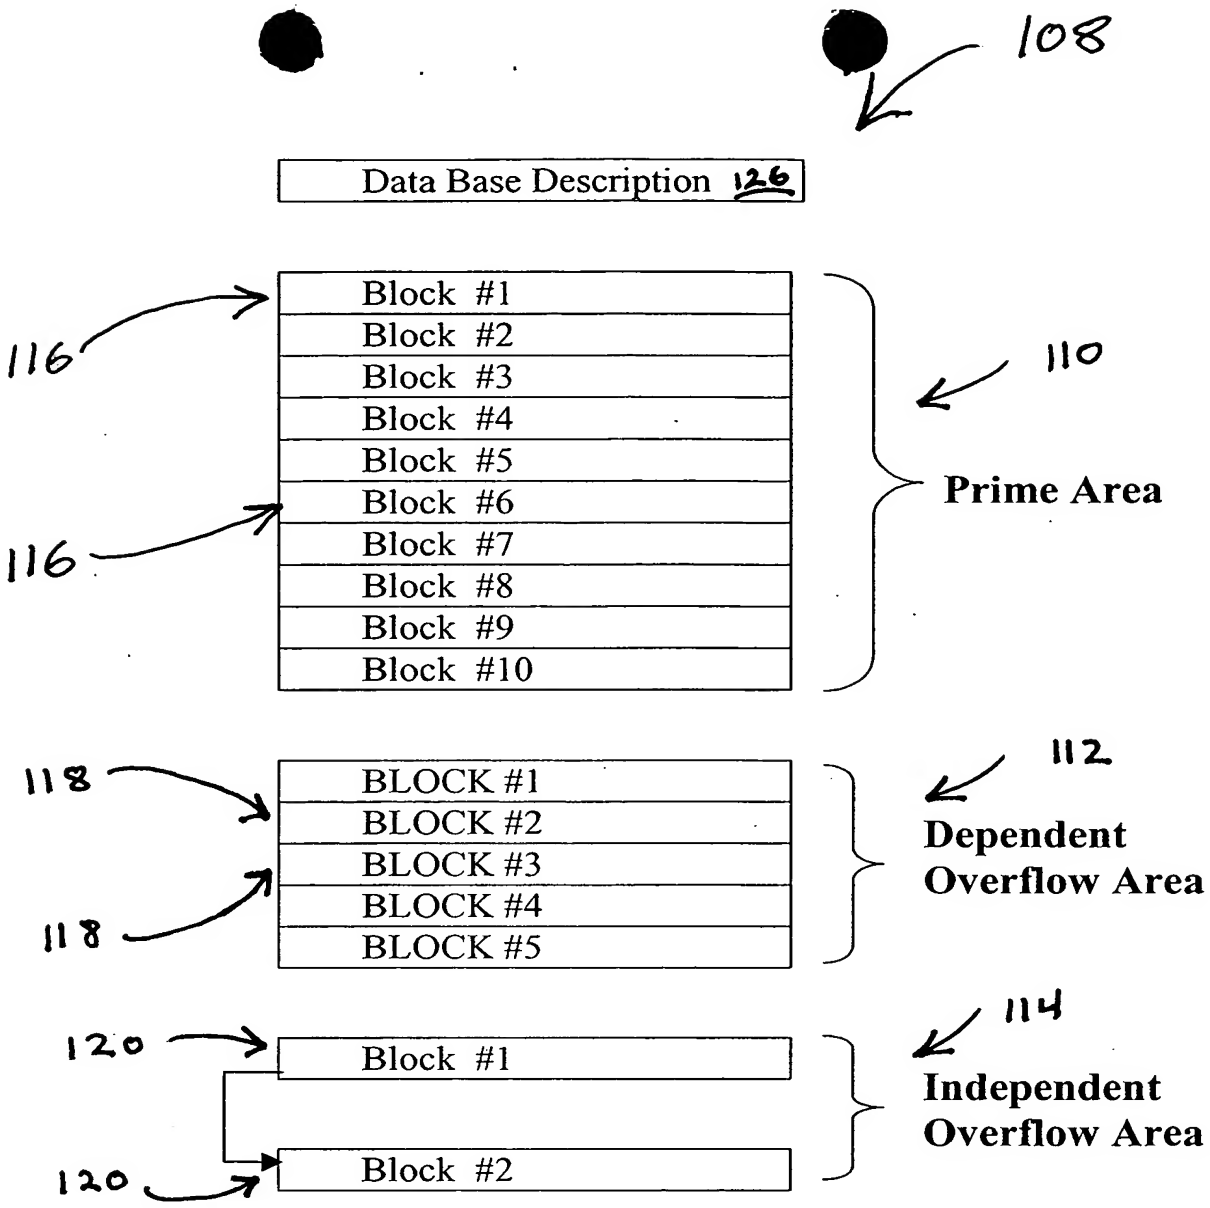

Figure 12. Unit Of Work (UOW) Architecture

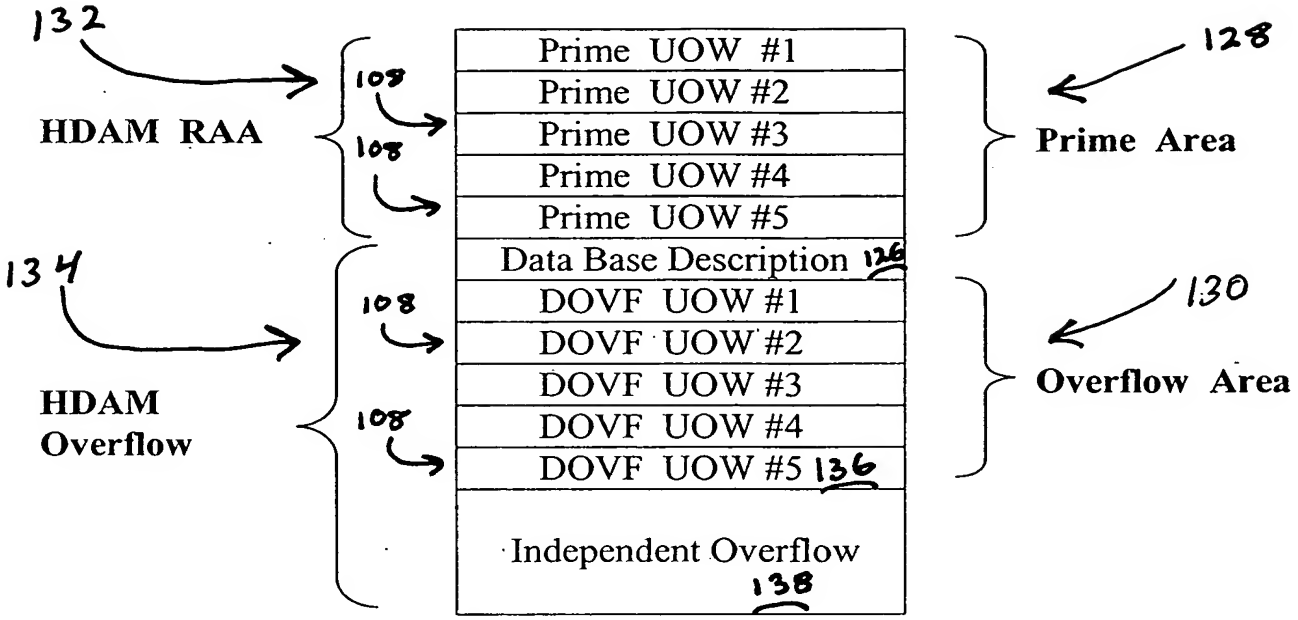

Figure 13. HDAM UOW Architecture

IBM Ref. SJ9-98-045

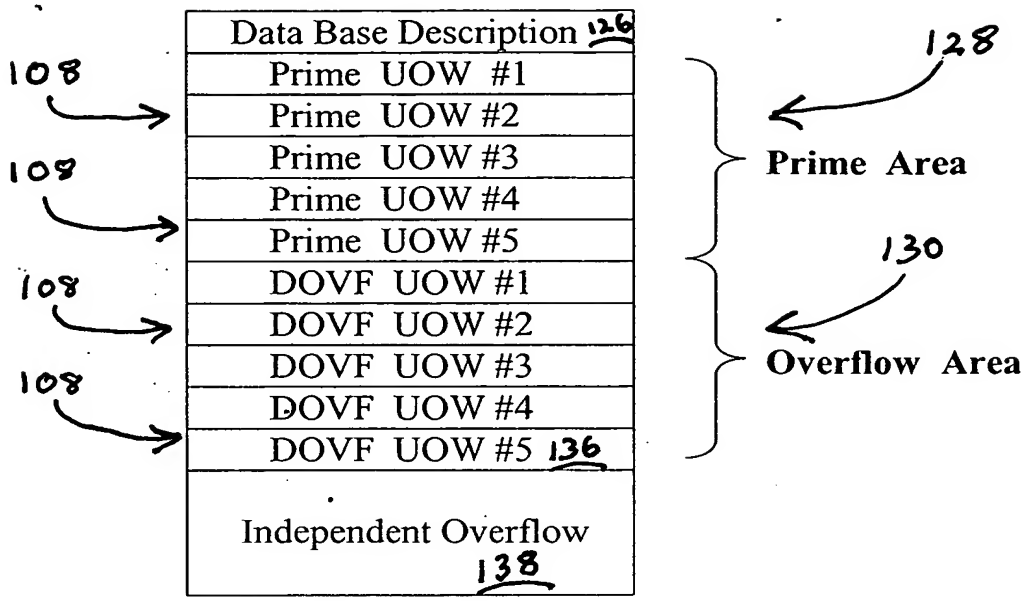

Figure 14. HIDAM UOW Architecture

Page 34 of 95 - 10/30/2004

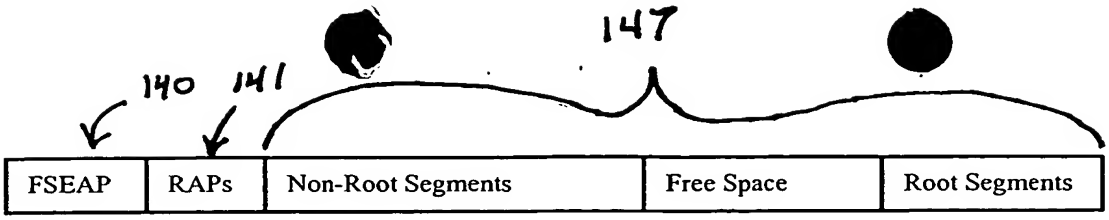

Figure 15. Prime & DOVF Block Composition

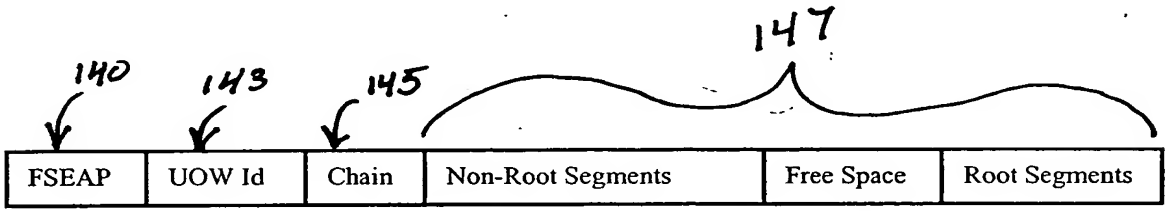

Figure 16. IOVF Block Composition

10036815.1010904

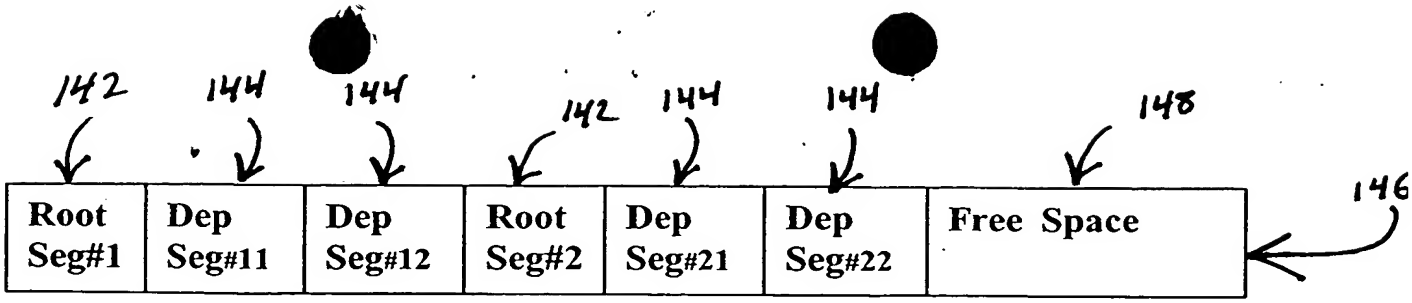

Figure 17 Block Composition Using IMS' Space Management

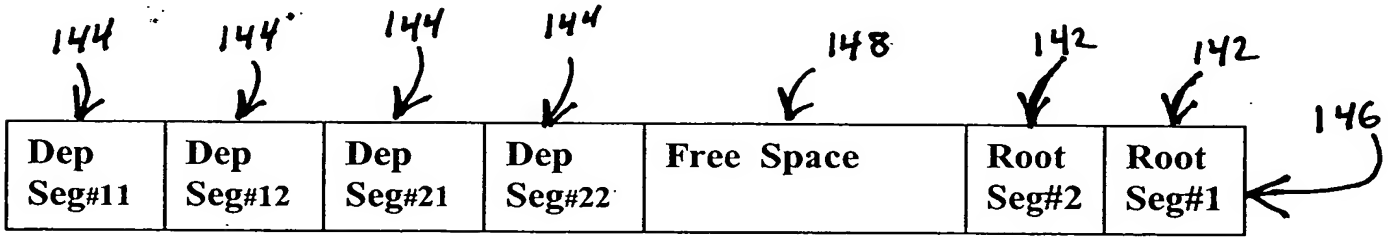

Figure 18 Block Composition Using Invention's Space Management

4603645.040404

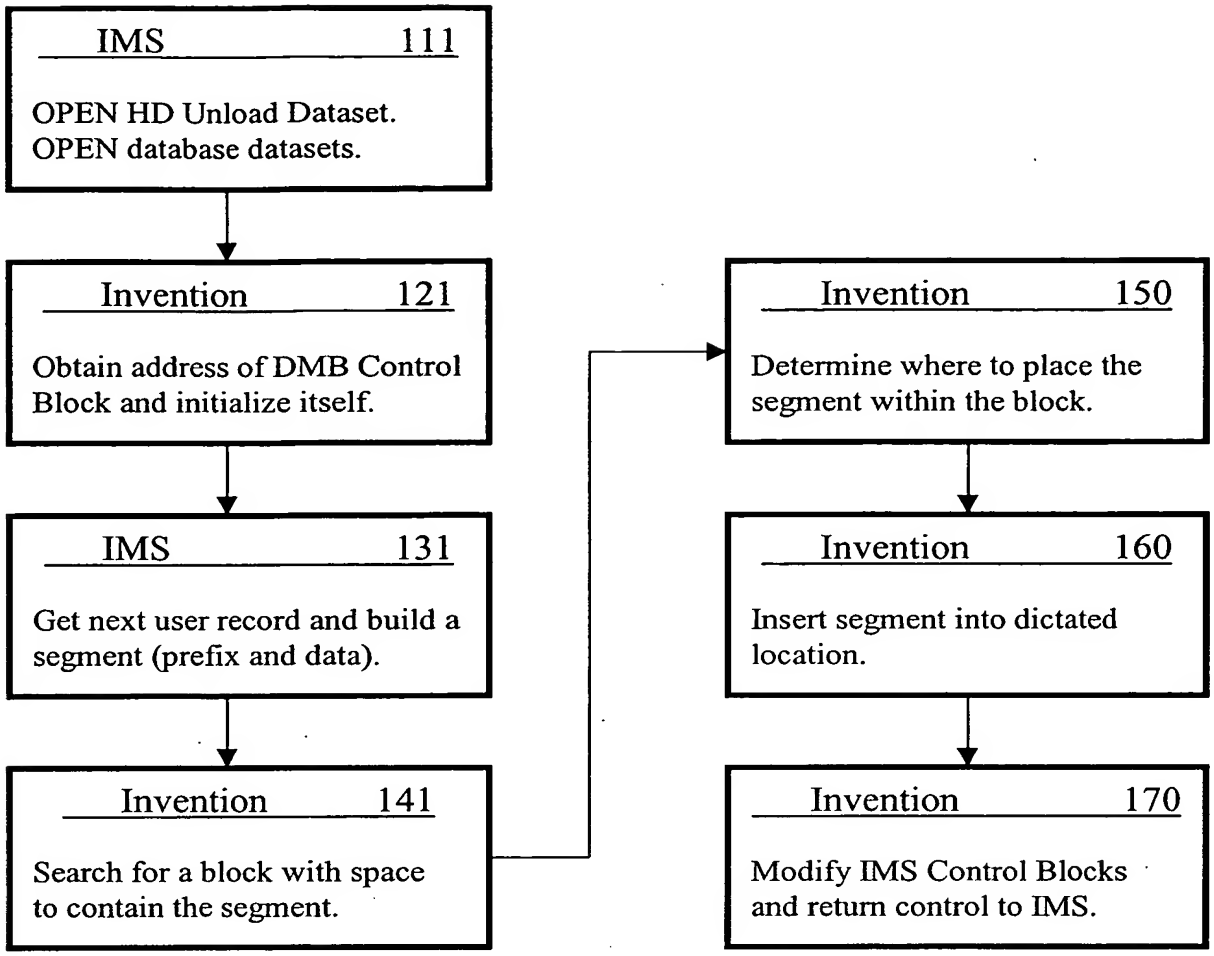

7,089,545 - 7,089,564

Figure 19 Space Management at Database Load Time

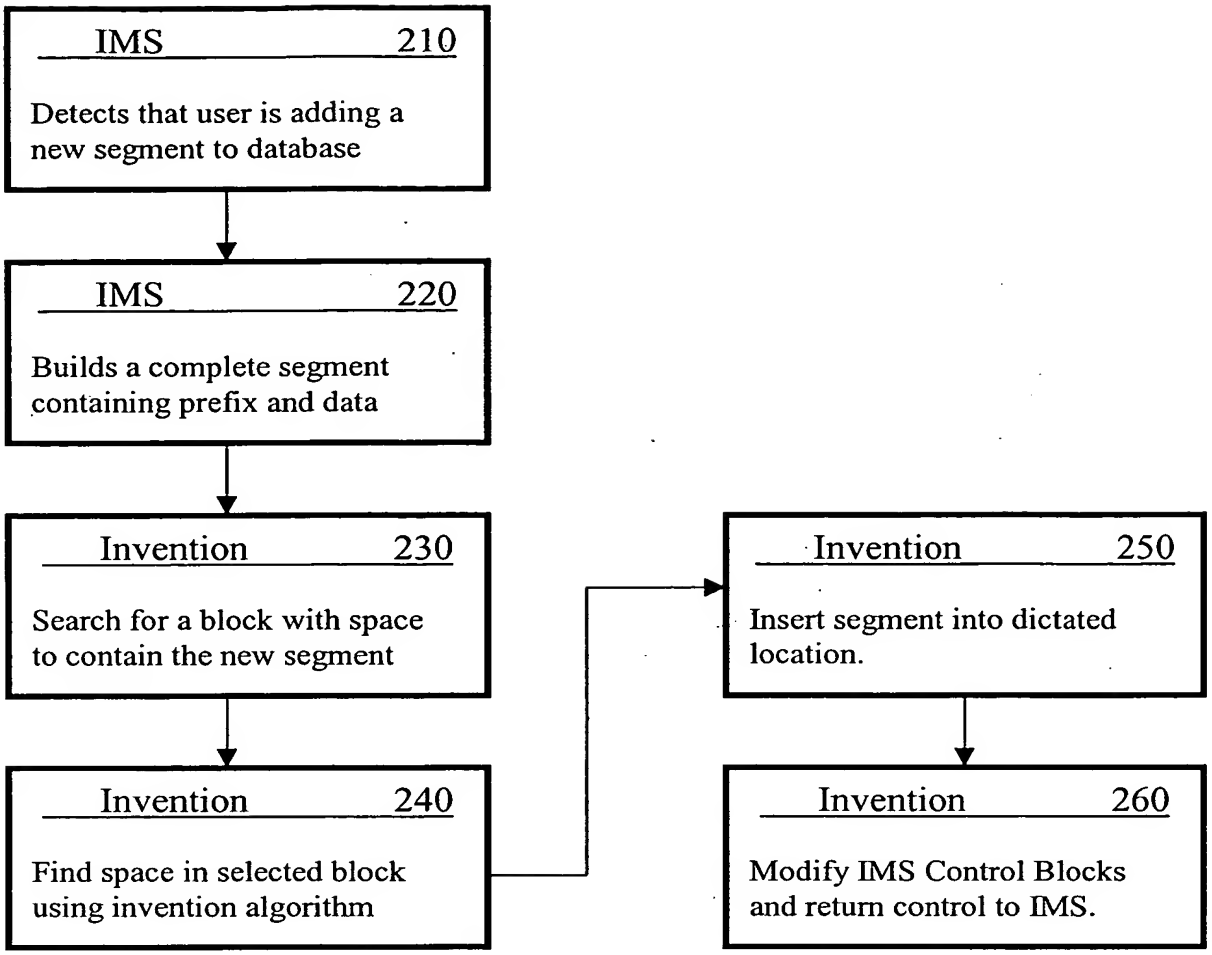

Figure 20 Space Management at Database Update Time

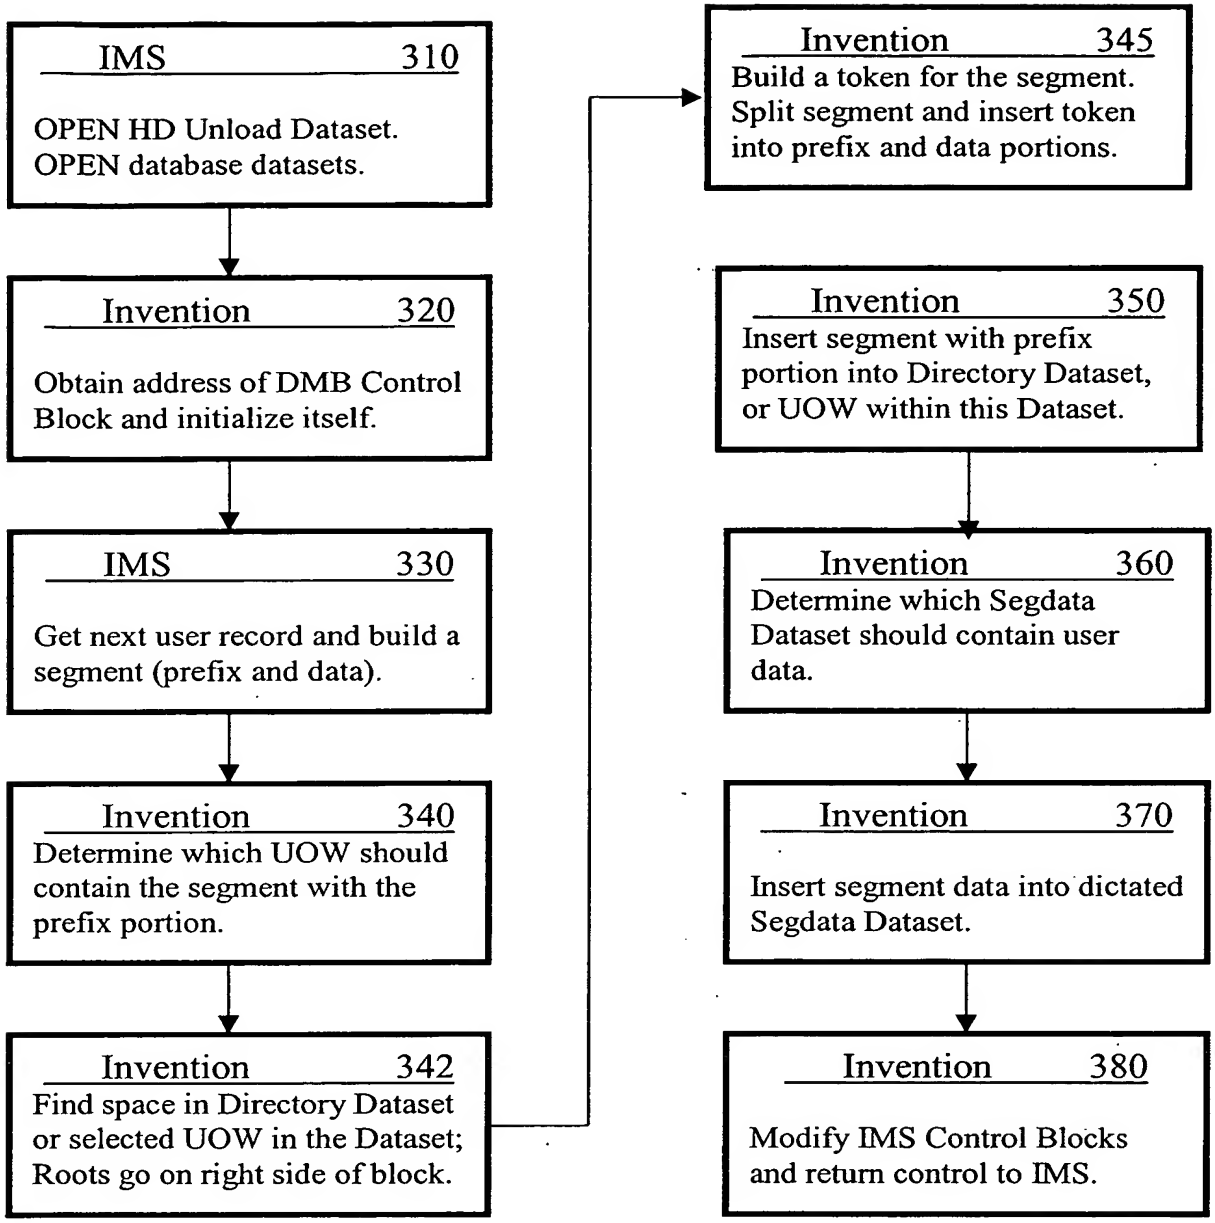

Figure 21. Space Management at Database Load Time

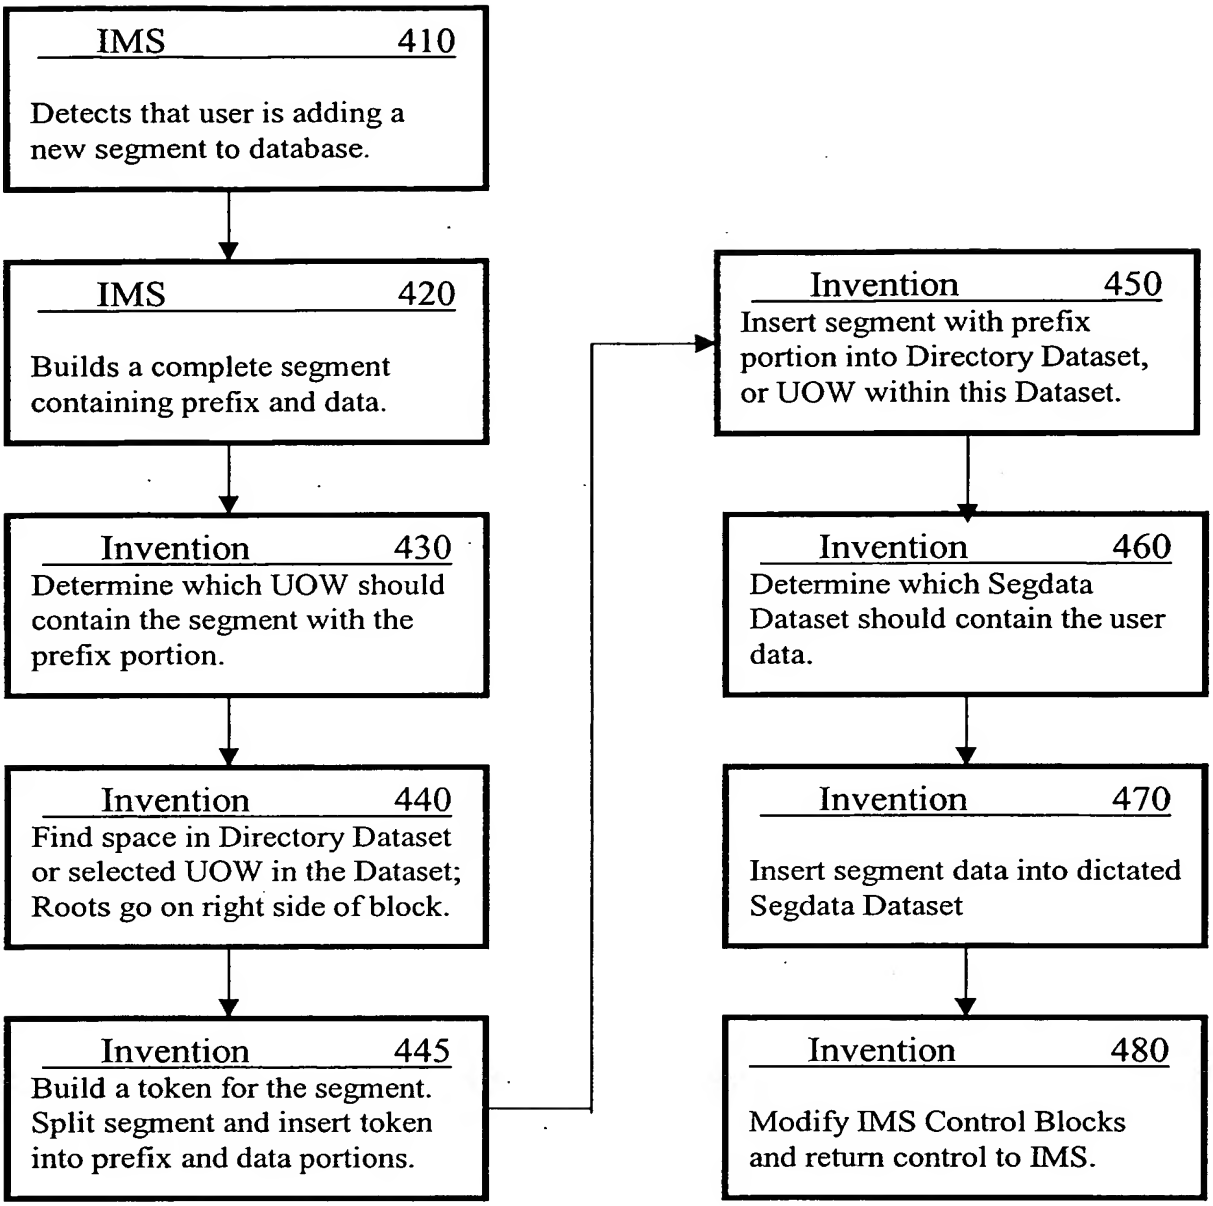

Figure 22. Space Management at Database Update Time